

Security fittings

Flush-fitted security rose


■ Aluminium
■ Stainless steel
■ Bronze



73 7396 

73 7396 01010
(with cylinder guard)
73 7396 02010
(without cylinder guard)

- Door thickness 57 mm upwards
- Tested and certified under DIN 18257 ES 1 and DIN 18273 for fire doors
- Set includes flush-fitted variants on both sides
- M5 screws for fixing

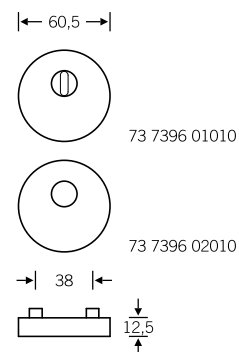

Since flush-fitted installation has no bearing on the security grade, security roses can be installed with a small projection of a few millimetres or be surface-mounted in a 'classic' way.

Suitable routing jig:

FSB 03 0462 00030; see page 782

Order details required:

- Door thickness
- Variant 73 7396 01010 or 02010
- Material/finish
- Quantity

8c