


FSB 1021 | Design: Hartmut Weise


FSB ASL® set in Stainless Steel 6204

Door handle


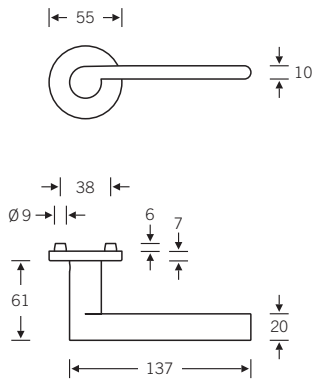


Knob


23 0829, for lever/knob sets

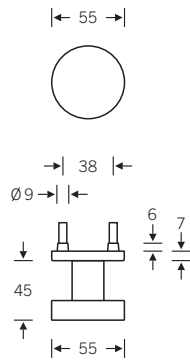

Key roses



WC roses



Pictured: Stainless Steel Natural Colour, Brushed Satin, Matt

Features

- Turnably fixed bearing with adaptor system
- Positive mechanism type A
- Stainless steel-reinforced base
- Standard door thickness 39–58 mm, max. door thickness 120 mm
- 20 mm door thickness increments
- Concealed handle bushing
- Suitable for both sides
- Operating angle 45°
- M5 stainless steel through-fixing, concealed
- Drill hole Ø 9 mm

Classification code

pursuant DIN EN 1906:2012-12, grade 4
4 | 7 | – | 0 | 1 | 1 | 0 * / 5 | 0 | A

* Bronze

Version	Square	Keyway	Item number
Lever/lever set	8 mm	PC WL	12 1021 01310 6204 12 1021 01302 6204
Lever/lever set	8 mm	without roses	12 1021 01320 6204
Lever/lever set	8 mm	blank	12 1021 01300 6204
Bathroom set	8 mm	WC-R/7 mm	12 1021 01969 6204
Bathroom set	8 mm	WC-R/6 mm	12 1021 01974 6204
Lever/knob set right/left	8 mm	PC (R)	12 1021 01710 6204

Design description


fsb.de/1021

Handle with a grip of flattened rectangular cross-section and a rounded end joined to a cylindrical neck


Materials | FSB Colour Codes

www.fsb.de/materials


Aluminium anodised

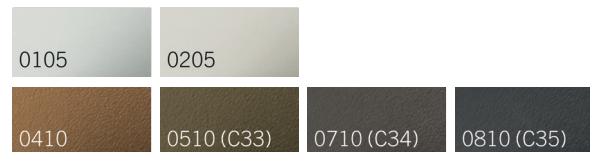

Aluminium powder-coated



Stainless Steel



Bronze patinated

