


# FSB 1144 | Design: Jasper Morrison


## FSB ASL® set in Aluminium 0105

### Door handle

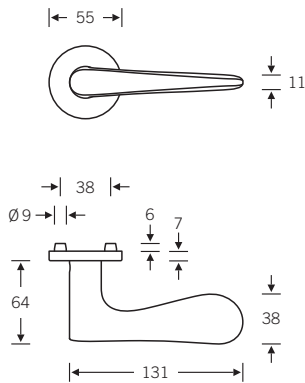


### Knob


23 0844, for lever/knob sets

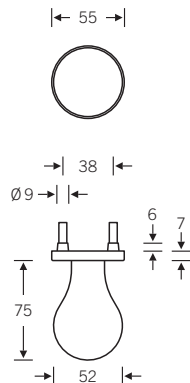

### Key roses

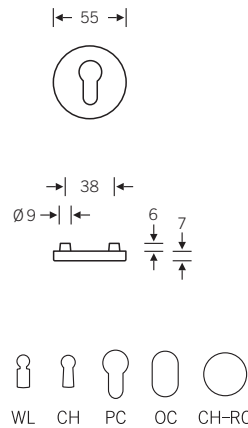

### WC roses

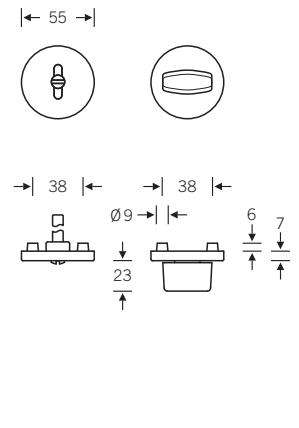

Pictured: Aluminium Natural Colour, Anodised, Glossy

### Features

- Turnably fixed bearing with adaptor system
- Positive mechanism type A
- Stainless steel-reinforced base
- Standard door thickness 39–58 mm, max. door thickness 120 mm
- 20 mm door thickness increments
- Concealed handle bushing
- Suitable for both sides
- Operating angle 45°
- M5 stainless steel through-fixing, concealed
- Drill hole Ø 9 mm

### Classification code

pursuant DIN EN 1906:2012-12, grade 4  
4 | 7 | – | B\* | 1 | 0\*\*/5 | 0 | A

\* testing in accordance with EN 1634-1 | \*\* bronze

Version	Square	Keyway	Item number
Lever/lever set	8 mm	PC WL	12 1144 01310 0105 12 1144 01302 0105
Lever/lever set	8 mm	without roses	12 1144 01320 0105
Lever/lever set	8 mm	blank	12 1144 01300 0105
Bathroom set	8 mm	WC-R/8 mm	12 1144 01954 0105
Lever/knob set right/left	8 mm	PC	12 1144 01710 0105

### Design description


fsb.de/1144

Modern, spoon-shaped, moulded-to-the-hand design drawing on the brake handle on a horse-drawn carriage

### Materials | FSB Colour Codes

www.fsb.de/materials


#### Aluminium anodised

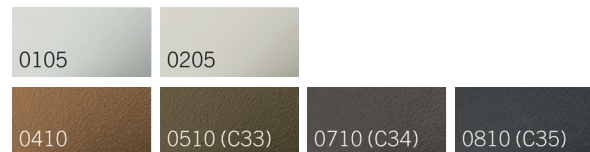

#### Aluminium powder-coated



#### Stainless Steel



#### Bronze patinated

