


FSB 1291 | Design: Foster + Partners Industrial Design


FSB ASL® set in Stainless Steel 6204

Door handle

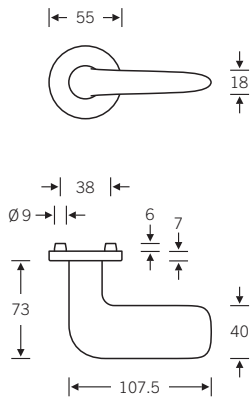


Knob


23 0871, for lever/knob sets

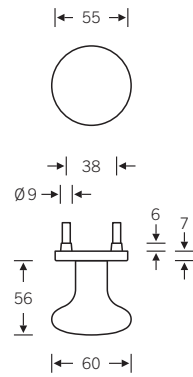

Key roses

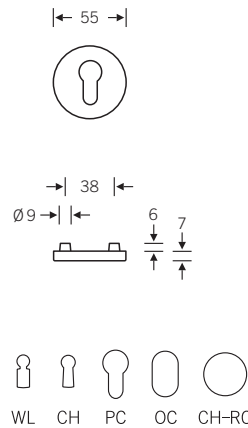

WC roses

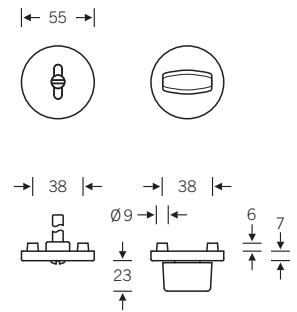

Pictured: Stainless Steel Natural Colour, Brushed Satin, Matt

Features

- Turnably fixed bearing with adaptor system
- Positive mechanism type A
- Stainless steel-reinforced base
- Standard door thickness 39–58 mm, max. door thickness 120 mm
- 20 mm door thickness increments
- Concealed handle bushing
- Suitable for both sides
- Operating angle 45°
- M5 stainless steel through-fixing, concealed
- Drill hole Ø 9 mm

Classification code

pursuant DIN EN 1906:2012-12, grade 4
4 | 7 | – | B* | 1 | 0**/5 | 0 | A

* testing in accordance with EN 1634-1 | ** bronze

Version	Square	Keyway	Item number
Lever/lever set	8 mm	PC WL	12 1291 01310 6204 12 1291 01302 6204
Lever/lever set	8 mm	without roses	12 1291 01320 6204
Lever/lever set	8 mm	blank	12 1291 01300 6204
Bathroom set	8 mm	WC-R/8 mm	12 1291 01954 6204
Lever/knob set right/left	8 mm	PC	12 1291 01510 6204

Design description


fsb.de/1291

L-shaped lever handle, short in plan view, large-surface and approximately rectangular in shape, bent at 90°, with a circular lever handle neck merging into a flat, horizontal and tapered handle, curved on both the top and bottom sides, and ending in a rectangular, soft-swinging shape.

Materials | FSB Colour Codes


www.fsb.de/materials

Aluminium anodised

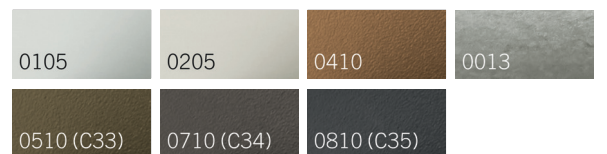


Aluminium Pure

Aluminium powder-coated (further RAL colour shades to order)



Stainless Steel



Bronze patinated

