


# FSB 1291 | Design: Foster + Partners Industrial Design


## FSB ASL® set in Stainless Steel 6204

### Door handle

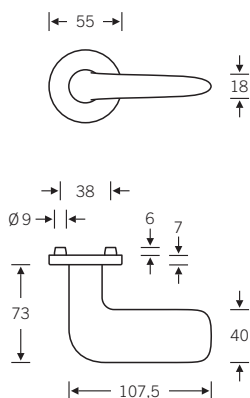


### Knob


23 0871, for lever/knob sets

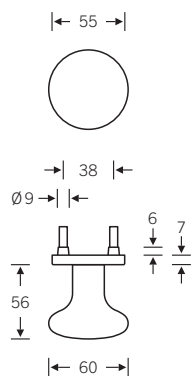

### Key roses

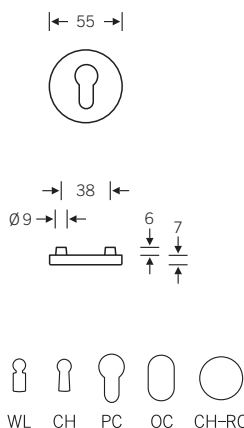

### WC roses



Pictured: Stainless Steel Natural Colour, Brushed Satin, Matt

### Features

- Turnably fixed bearing with adaptor system
- Positive mechanism type A
- Stainless steel-reinforced base
- Standard door thickness 39–58 mm, max. door thickness 120 mm
- 20 mm door thickness increments
- Concealed handle bushing
- Suitable for both sides
- Operating angle 45°
- M5 stainless steel through-fixing, concealed
- Drill hole Ø 9 mm

### Classification code

pursuant DIN EN 1906:2012-12, grade 4  
4 | 7 | - | 0 | 1 | 1 | 0 \* / 5 | 0 | A

\* Bronze

Version	Square	Keyway	Item number
Lever/lever set	8 mm	PC WL	12 1291 01310 6204 12 1291 01302 6204
Lever/lever set	8 mm	without roses	12 1291 01320 6204
Lever/lever set	8 mm	blank	12 1291 01300 6204
Bathroom set	8 mm	WC-R/7 mm	12 1291 01969 6204
Bathroom set	8 mm	WC-R/6 mm	12 1291 01974 6204
Lever/knob set right/left	8 mm	PC	12 1291 01510 6204

### Design description


fsb.de/1291

L-shaped lever handle, short in plan view, large-surface and approximately rectangular in shape, bent at 90°, with a circular lever handle neck merging into a flat, horizontal and tapered handle, curved on both the top and bottom sides, and ending in a rectangular, soft-swinging shape.

### Materials | FSB Colour Codes


fsb.de/materials

#### Aluminium anodised

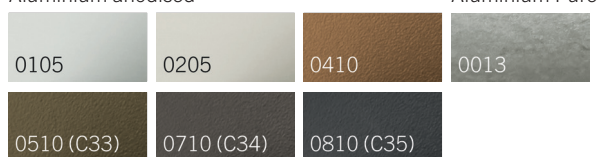

#### Aluminium Pure

#### Aluminium powder-coated (further RAL colour shades to order)



#### Stainless Steel



#### Bronze patinated

